


120V LED Strip Light: Border Light Series

Model: LT-FCB-2W-6x9-(LENGTH)-Ex-(COLOR)-a

LED WORLD™
www.ledworldlighting.com
1-800-387-4081

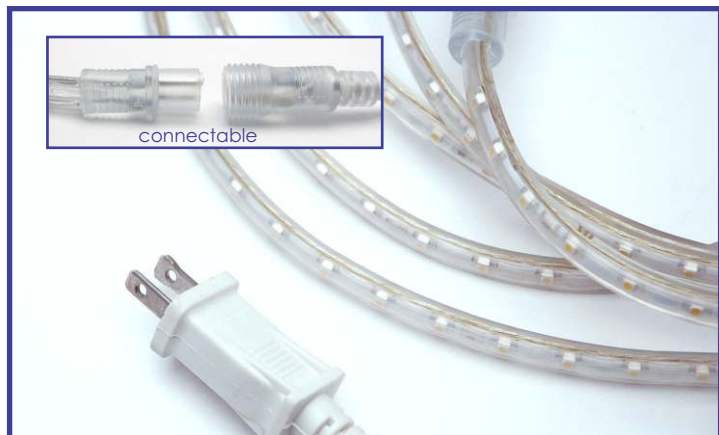

LED 3528 SMD

SUPER BRIGHT

1.45 WATTS FOOT

flexible

VIEW ANGLE

120°


CONNECT

UP TO 124 FT

VERSATILE

120VAC PLUG & PLAY


80+ CRI



BENEFITS


- Connectable up to 124 Feet
- Plug and Play, uses standard 120VAC plug
- Thin, Sleek and Flexible
- Super Bright - Visible over long distances
- High Quality SMD (Surface Mounted Diode) LED
- UV Stable PVC
- Little or no heat, low power consumption
- Easy to Install
- Indoor/Outdoor use
- Excellent Flexibility
- Easily installs to create straight lines using optional U-Channel
- Does not require additional drivers
- Up to 3x brighter than LED Rope Light
- Energy efficient
- Available in Warm White, Day White, Red and Blue

COLORS AVAILABLE

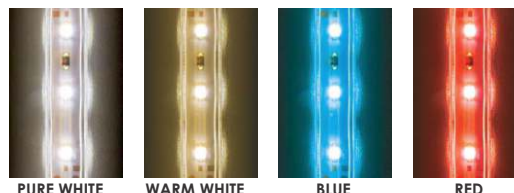

DIAGRAM

SIZES AVAILABLE (red will slightly vary)

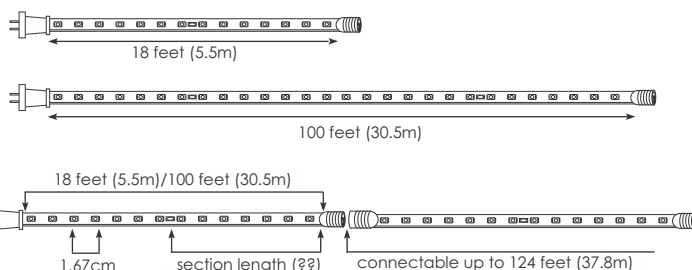

APPLICATIONS

- Designed for continuous outdoor linear lighting
- Architectural accent lighting
- Perimeter border building lighting

SPECIFICATIONS

Roll Size Available	5.5 Meters (18 Feet)/30.5 Meters (100 Feet)
Max Voltage	120 VAC
Watt Foot	1.45
Light Source	3528 SMD LED
Brightness	120~130 lumens/ft
Side Dimensions	6mm(W)x9(H)mm
Max Length	124 feet (connectable)
View Angle	120° - 140°
Color(s)	Warm White, Pure White, Red, Blue
Bend Radius	4 inches (100mm)
Lamp Life	Up to 25,000 hours (average life)
IP Rating	IP44
Bulb Spacing	1.67cm (0.65")
Mount	Optional U-Channel
Operating Temperature	Indoor/Outdoor (-30°C to 40°C/ -22°F to 140°F)
Includes	One Factory Power Cord/clips/screws

OPTIONAL ACCESSORIES

U13MM50 3/8"



Easily installs into U-Channel for straight building perimeter lines or with included Mounting Clips

