

100W 24V Class 2 DMX512 Driver

Model : LW-24100-5C-ADJ

LED WORLD
ledworldlighting.com | ledworld.ca
1-800-387-4081



FEATURES

- Constant Voltage Output
- Universal AC input: 100~277VAC
- Power Factor > 0.98
- High efficiency > 89%
- Featuring RDM (Remote Device Management), NFC (Near Field Communication) to read and write DMX 512 address
- 5 Channel output
- Flicker-free, $f > = 4\text{KHz}$
- Protection : Short circuit / Over Loading / Over temperature
- Suitable for use in dry, damp and wet indoor/outdoor locations
- Easy installation
- Free Air convection cooling
- Full protection aluminum housing
- cULus listed
- Suitable for color changing LED lighting and sign lighting applications
- 8 knockouts for easy wiring




SPECIFICATIONS

Output	DC Voltage	24V
	Voltage Tolerance	$\pm 0.5\text{V}$
	Rated Current	4.16A
	Rated Power	100W
	Voltage Range	100~277VAC
Input	Frequency Range	47~63Hz
	Power Factor (Typ.)	PF $\geq 0.98/120\text{V}$
	Efficiency (Typ.)	89% @ 230VAC
	AC Current (Typ.)	1.3A @ 100VAC
	Leakage Current	< 0.50mA
	Inrush Current	20A. 50%, 1.6ms
	THD	<10% (120VAC)
Protection	Over Temp.	100°C \pm 10°C shut down o/p voltage, recovers automatically after cooling
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed
	Over Loading	$\leq 120\%$ constant current limiting, auto-recovery
Environment	Working Temp.	-40°C ~ 60°C (-40°F ~ 140°F)
	Working Humidity	20~90 % RH, non-condensing
	Storage Temp. Humidity	-40°C ~ 80°C, 10~95 % RH
	Temp. Coefficient	$\pm 0.03\%$ / °C (0~50°C)
Safety & EMC	Vibration	10~500Hz, 5G 10min/1 cycle, period for 60min each along X, Y, Z axes
	Safety standards	UL8750 CAN/CSA-C22.2 NO.250.13
	Withstand voltage	I/P-O/P:3.75KVAC
	Isolation Resistance	I/P-O/P: 100M Ω /500VDC/25°C/70%RH
Other	EMC EMISSION	FCC Part 15 B
	Net. Weight	1.3Kg (2.86lbs)
	Size	221.7 L x 124 W x 42 H mm (8.73" x 4.88" x 1.65")


100W 24V Class 2 DMX512 Driver

Model : LW-24100-5C-ADJ

PRODUCT DIMENSION

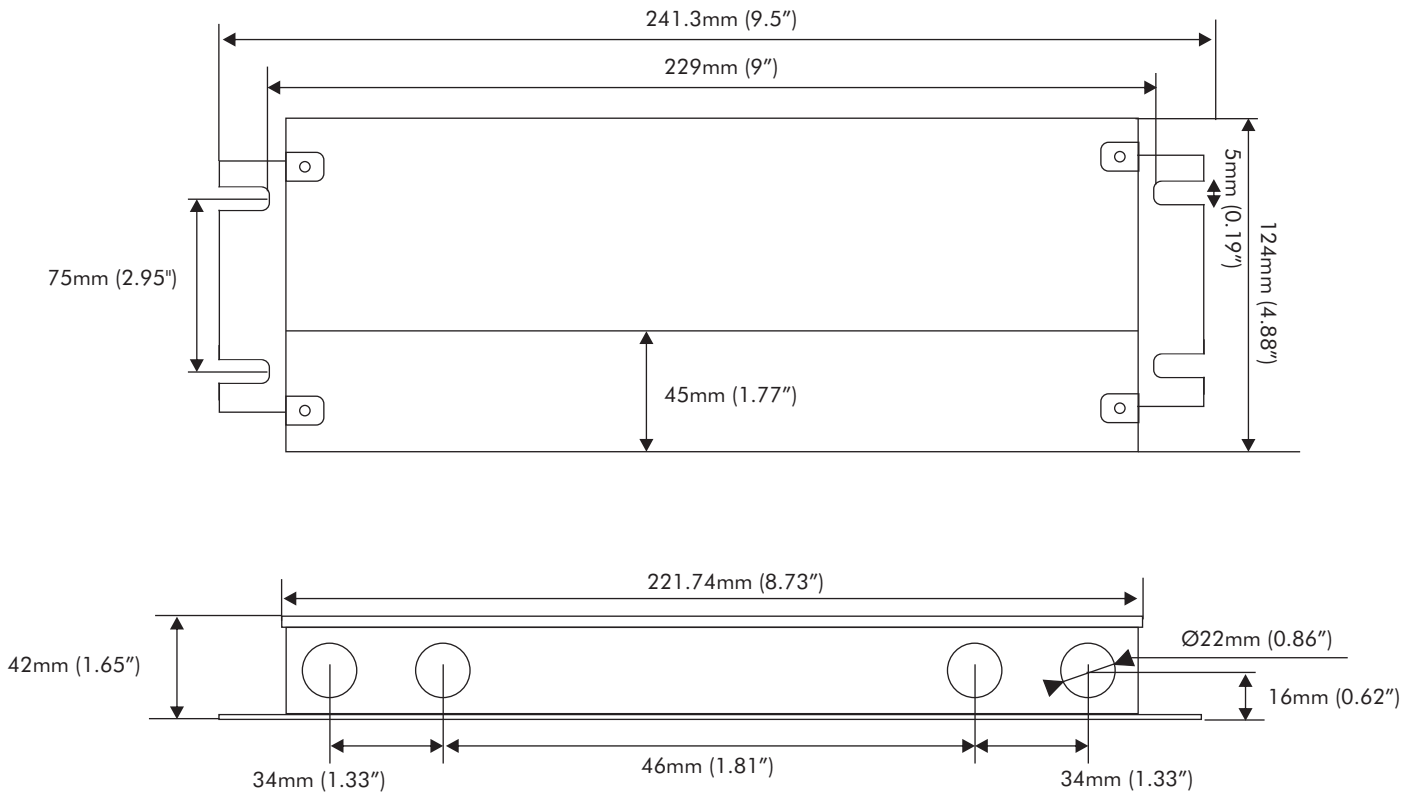

KNOCKOUTS

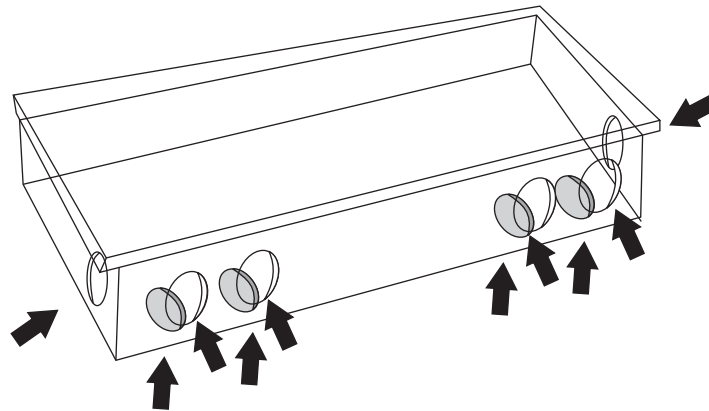

WARNING

- Check polarity
- Risk of Electric Shock. Indoor use only. Suitable for dry and damp locations.
- Risk of Fire. Installation involves special wiring methods to run wiring through a building structure. Consult a qualified electrician.
- Risk of Electric Shock. Mount the unit at a height more than 1 ft (30cm) from the ground