

# 4 Pin RGB Strip to RGB Strip Clamp Connector

Model: CL10BB-4



**LED WORLD**  
ledworldlighting.com | ledworld.ca  
1-800-387-4081

**CAUTION:** Max 5 Amps 12/24VDC (low voltage). Use only with Class 2 power supply. Max 90 LEDs/Meter. Indoor dry location use.


**ATTENTION:** Utiliser seulement avec la classe 2 bloc d'alimentation.

For use only with LED World's type A (IP20) 12VDC and 24VDC 10mm wide RGB LED Flex Strips. Not to be used with Type B or C (Strips that have covers or coatings).

**Important Note:** Check the Polarity and make sure that connector contact points are directly over (and centered) the LED Flex Strip connector pads. Do not connect LED strips at soldered contact points.

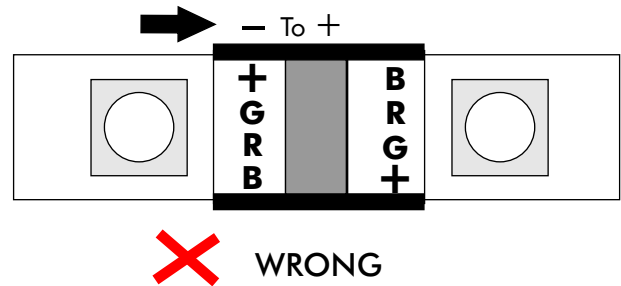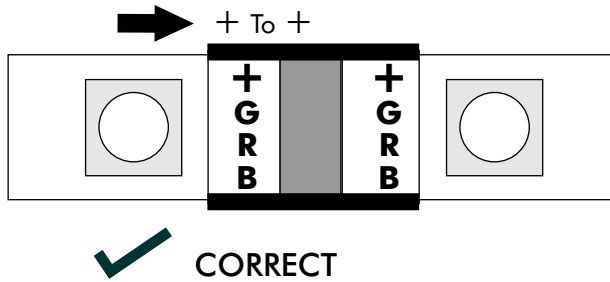


## CONNECTOR ENDS



Strip Connection End


## INSTALLATION STEPS

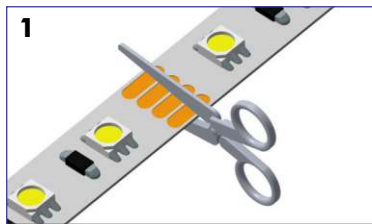

1 Cut the LED Strips at the cut mark (pads)



2 Remove the wax paper from back of the LED Strips

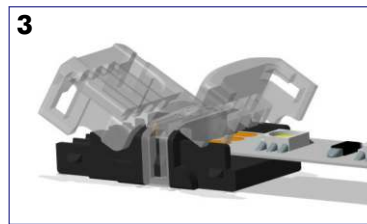

3 Push both LED Strips into contact points over pads. Close the caps gently



4 Complete the LED Strip connections using pliers. Make sure connection is locked at base of connector.



5 Test Connection