

SIDE EMITTING RGB LED FLEX STRIP

Model: FA4713-108-24-RGB

LED WORLD
ledworldlighting.com | ledworld.ca
 1-800-387-4081



MODEL

FA4713-108-24V-RGB

- COLOR (Red, Green, Blue)
- VOLTAGE (24V)
- LED TYPE (4713 SMD)
- LED/METER (108 LED/Meter)
- COVER TYPE
- A=IP20 B=IP62 C=IP64
- FLEX STRIP

24V
DC Power

4.0
WATTS
FOOT

SUPER BRIGHT
RGB

LISTED
use only with
Class 2 Type
power units

flexible

VIEW ANGLE
180°

30,000+
HOURS

3 YEARS
Limited Manufacturer
Warranty

TRIMMABLE

COLOR CHANGING

STATIC ELECTRICITY
CAN DAMAGE
PRODUCT



BENEFITS

- Color Changing RGB
- Side Emitting LEDs
- View Angle 180°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- Low power consumption and little heat
- No RF interference
- Long life of LEDs
- Flexible RGB LED strip lights
- Solid-state lighting
- Can be cut to size at marked intervals (Qualified Electrician)





APPLICATIONS

- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition displays
- Channel letters

SPECIFICATIONS

Roll Size	5 Meters (16.4 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt Foot	4.0 (2.69 Amps/roll)
Light Source	108 pcs/Meter (39.37") 4713 Side Emitting SMD LED
Dimensions	5000(L) x 12(W) x 2(H)mm (16.4' x 0.47" x 0.078")
Max Length	5 Meters (16.4 Feet)
View Angle	180°
Max Current	269mA/foot
Bend Radius	4 inches (100mm) Max, one
Lamp Life	>30,000 hours (average life)
IP Rating	IP20 Type A
Mount	Smooth Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F~104°F)

DIAGRAM

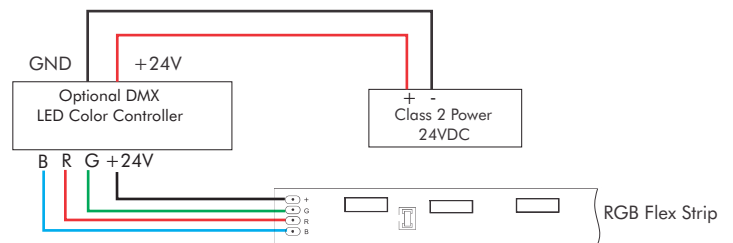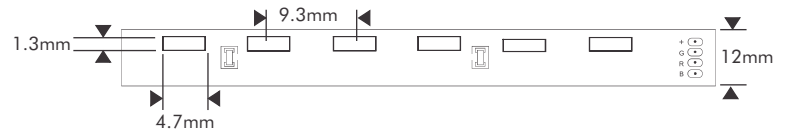

OPTIONAL CLASS 2 POWER SUPPLIES

MD-024-060VTDHV2 One Channel Output-Class 2	MD-024-096VTDHV2 Constant Voltage Driver

OPTIONAL CONTROLLERS

FUT089 RGBW Remote 	HUEDA™ 	HUEDA™ HUB
-------------------------------	-------------------	-----------------------